



## THE SCM SERIES - Sub-micro AC drive *with basic I/O*

The compact packaging and comprehensive functionality makes the SCM an ideal drive to use on equipment requiring variable speed, soft starting or reversing operation.

The easy to use SCM series is configured and ready to use right out of the box for most simple applications. By simple reprogramming, the SCM can perform many application specific tasks such as multiple preset speeds, electronic braking and motor jogging to name a few.

The user manual and quick reference guide for the SCM Series Drive, and all AC Tech drives, are available in the AC Tech website Library: [www.actechdrives.com](http://www.actechdrives.com).

### General Specifications

**Power Range:** 1/3 to 15 HP (0.25 to 11 kW)

#### Supply Power:

Single Phase: 120, 208, 220 or 240 VAC  
Three Phase: 208, 220, 240, 400 or 480 VAC  
(+10/-15%) 50 / 60 Hz

**Motors:** The SCM is designed to operate standard polyphase induction motors rated for 200, 230, 400 or 460 VAC from 0 to 240 Hz.

**Enclosure:** IP20 with finger safe terminals.

### Standard Features

**Easy Set-up and Operation:** The SCM is easy to use right out of the box or can be customized to meet your specific requirements any one of four convenient ways:

- From the front of the drive
- The optional Remote Keypad
- The innovative EPM Programmer.
- A PC using AC Tech's free TechLink Software and the EPM Programmer.

**Motor Thermal Overload:** The SCM is an approved motor protection device for single motor applications.


**Control I/O:** Eleven isolated terminals provide connection for 0-10V or 4-20mA reference, 1 fixed and 3 programmable logic inputs and 1 programmable relay output.

**Quiet Operation:** Adjustable carrier frequency up to 10 kHz.

### SCM Options


#### NEMA 4X Remote Keypad:

Simple four wire connection to the SCM for operation and programming of the drive. High-impact plastic and gasket permit installation in NEMA 4X (IP65) environments.



#### DIN Rail Mounting Kit:

Allows easy mounting of the SCM Drive onto standard DIN Rail.



#### Dynamic Braking Kit:

Prepackaged resistor modules with control electronics provide easy mounting within the control cabinet.



#### AC Line Filters:

AC input line filters are available for all sub-micro drives to meet European requirements for susceptibility and emissions of electrical and radiated noise (EN 61800-3 and EN 5501). The filter is designed to mount to the electrical panel and has provisions for mounting the drive directly to the face of the filter.


#### EPM Programmer:

Copy drive programs in 2 seconds using The EPM Programmer! Then just plug the EPM into the SCM Series drive and it's ready for operation. The EPM Programmer also provides full programming capability using the backlit LCD display and file exchange with a Personal Computer.



# SCM Series Drive Dimensions and Ratings

Input Line Voltage: 120 Volt 1Ø		Output Voltage: 0 - 230 Volt 3Ø				
HP	(kW)	Input Amps	Output Amps	IP 20 Dimensions		
		1Ø		Model	Size	
.33	(0.25)	6.8	1.9 / 1.7	SM004S	A5	1.5 (0.7)
.5	(0.37)	9.2	2.8 / 2.4	SM005S	A5	1.5 (0.7)
1	(0.75)	16.6	4.8 / 4.2	SM010S	B5	2.7 (1.2)
1.5	(1.1)	24	6.9 / 6.0	SM015S	B5	3.0 (1.4)




**A**

Depth

- A1: 3.94 in (100)
- A2: 4.74 in (120)
- A3: 5.74 in (146)
- A5: 3.26 in (83)
- A6: 3.63 in (92)
- A7: 5.56 in (141)

Input Line Voltage: 208 / 240 Volt 1Ø		Output Voltage: 0 - 200 / 230 Volt 3Ø				
HP	(kW)	Input Amps	Output Amps	IP 20 Dimensions		
				Model	Size	
.33	(0.25)	3.9 / 3.4	1.9 / 1.7	SM204S	A5	2.0 (0.9)
.5	(0.37)	5.8 / 5.0	2.8 / 2.4	SM205S	A5	2.0 (0.9)
.75	(0.55)	6.9 / 6.0	3.7 / 3.2	SM208S	A6	2.6 (1.2)
1	(0.75)	10.6 / 9.2	4.8 / 4.2	SM210S	A6	3.6 (1.6)
1.5	(1.1)	13.9 / 12.0	6.9 / 6.0	SM215S	B5	4.0 (1.8)
2	(1.5)	18.4 / 16.0	8.1 / 7.0	SM220S	B5	4.1 (1.9)
3	(2.2)	24 / 21	11.0 / 9.6	SM230S	B1	5.0 (2.3)




**B**

Depth

- B2: 6.74 in (171)
- B5: 4.88 in (124)
- B6: 5.53 in (140)

Input Line Voltage: 208 / 240 Volt 3Ø		Output Voltage: 0 - 200 / 230 Volt 3Ø				
HP	(kW)	Input Amps	Output Amps	IP 20 Dimensions		
				Model	Size	Weight <sup>1</sup>
.5	(0.37)	3.1 / 2.7	2.8 / 2.4	SM205	A5	1.4 (0.6)
1	(0.75)	5.8 / 5.1	4.8 / 4.2	SM210	A6	1.7 (0.8)
1.5	(1.1)	8.0 / 6.9	6.9 / 6.0	SM215	A7	2.4 (1.1)
2	(1.5)	9.1 / 7.9	8.1 / 7.0	SM220	A7	2.5 (1.1)
3	(2.2)	12.4 / 10.8	11.0 / 9.6	SM230	B1	3.2 (1.5)
5	(3.7)	19.6 / 17.1	17.5 / 15.2	SM250	BF	4.6 (2.1)
7.5	(5.5)	28 / 25	25 / 22	SM275	C1	7.3 (3.3)
10	(7.5)	34 / 32	30 / 28	SM2100	C1	7.5 (3.4)
15	(11)	54 / 48	48 / 42	SM2150	D1	13.0 (5.9)




**C**

Depth

- C1: 7.18 in (182)

Input Line Voltage: 400 / 480 Volt 3Ø		Output Voltage: 0 - 400 / 460 Volt 3Ø				
HP	(kW)	Input Amps	Output Amps	IP 20 Dimensions		
				Model	Size	Weight <sup>1</sup>
.5	(0.37)	1.6 / 1.4	1.3 / 1.1	SM405	A1	2.0 (0.9)
1	(0.75)	3.0 / 2.5	2.5 / 2.1	SM410	A2	2.4 (1.1)
1.5	(1.1)	4.3 / 3.6	3.6 / 3.0	SM415	A3	2.9 (1.3)
2	(1.5)	4.8 / 4.0	4.1 / 3.4	SM420	A3	3.1 (1.4)
3	(2.2)	6.4 / 5.4	5.8 / 4.8	SM430	B1	3.2 (1.5)
5	(3.7)	10.6 / 8.8	9.4 / 7.8	SM450	BF	4.6 (2.1)
7.5	(5.5)	14.2 / 12.4	12.6 / 11.0	SM475	C1	7.2 (3.3)
10	(7.5)	18.1 / 15.8	16.1 / 14.0	SM4100	C1	7.5 (3.4)
15	(11)	27 / 24	24 / 21	SM4150	C1	8.0 (3.6)

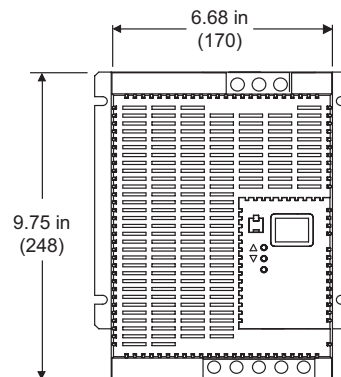

**D**

Depth

- D1: 8.00 in (203)

Dimensions shown are approximate.  
Please refer to User Guide.

**AC Tech**